













ROCKFON® BLANKA™

ASSORTMENT

| Edge detail | Module size (mm) | Weight (kg/m ²) | MS* / MS* easy access (mm) | Recommended installation system |
|---|--|--|----------------------------|---------------------------------|
|  A15 | 600 x 600 x 20 1200 x 600 x 20 | 2.3 | Local | Local |
|  A24 | 600 x 600 x 20 1200 x 600 x 20 1800 x 600 x 20 | 2.3 2.3 2.3 | Local | Local |
|  B | 600 x 600 x 20 1200 x 600 x 20 | 3.4 3.4 | Local | Local |
|  C | 600 x 600 x 20 1200 x 600 x 20 | 3.4 3.4 | Local | Local |
|  D | 600 x 600 x 20 1200 x 600 x 20 | 3.4 3.4 | Local | Local |
|  D/AEX | 1200 x 600 x 20 1500 x 600 x 20 1800 x 600 x 20 1200 x 300 x 20 1500 x 300 x 20 1800 x 300 x 20 | 3.4 3.4 3.4 3.4 3.4 3.4 | Local | Local |
|  E15 | 600 x 600 x 20 1200 x 600 x 20 | 2.8 2.8 | Local | Local |
|  E24 | 600 x 600 x 20 1200 x 600 x 20 | 2.8 2.8 | Local | Local |
|  G | 600 x 600 x 20 1200 x 600 x 20 | 3.4 3.4 | Local | Local |
|  M | 600 x 600 x 20 900 x 900 x 25 | 3.4 4.1 | Local | Local |
|  X | 600 x 600 x 22 1200 x 600 x 22 1800 x 600 x 22 | 3.7 3.7 3.7 | Local | Local |
|  Z | 600 x 600 x 20 1200 x 600 x 20 | 3.4 3.4 | Local | Local |


* MS - Minimum Suspension
More dimensions available upon request.

PERFORMANCE



Sound absorption

α_w : up to 1.00 (Class A)

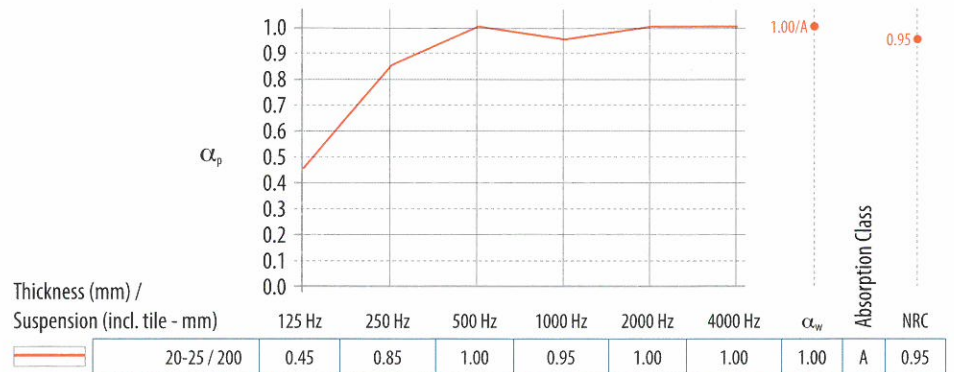

Reaction to fire

A1



Fire resistance

Local



Humidity and sag resistance

Up to 100% RH
1/C/0N
2/C/0N if panel width and length > 700mm



Light reflection and light diffusion

87% light reflection
>99% light diffusion



Visual appearance

Super-white surface
L value: 94.5

The whiteness (L value) of the product is tested in accordance with ISO 7724 and measured on a scale from 1 (black) to 100 (white).

Deep matt surface, perfect in critical side-light
Gloss: 0.8% at 85° angle

The gloss of the product is tested in accordance with ISO 2813.



Cleaning

Vacuum
Damp cloth
Wet-scrub resistance Class 2

The wet-scrub resistance is tested in accordance with EN ISO 11998:2007, rated on a scale from 1 to 5, where 1 is best.



Hygiene

Stone wool provides no sustenance to microorganisms



Surface durability

Enhanced durability and dirt resistance.



Environment

Fully recyclable



Indoor environment

A selection of ROCKFON products have been awarded

