
IMPRESSIONS™ CLIMAPLUS™

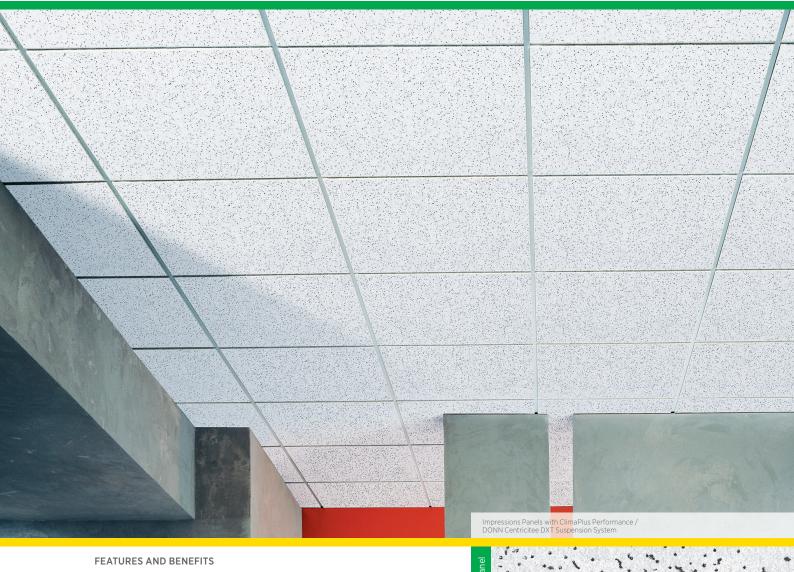


- Micro fissured non-directional pattern for a cleaner, whiter appearance
- ClimaPlus 30-year lifetime system warranty to withstand temperature and humidity conditions up to 49°C (120°F)/99% relative humidity without visible sag when used with a USG DONN® Brand suspension system.

APPLICATIONS

- Offices
- Retail
- Warehouse
- Schools
- Showrooms
- Restaurants

SUBSTRATE

• Water-felted mineral-fiber





Centricitee¹

DXT

IMPRESSIONS™ CLIMAPLUS™

IMPRESSIONS CLIMAPLUS PANELS

Edge	Panel Size ³	Class	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹
		0		NRC	CAC			∄	3		3
SQ	2 x 2 x 5/8" 600 x 600 x 16mm	Class A	903 ME903	.60	33	.84	White	A, B, C	Low		45%
	2 x 4 x 5/8" 600 x 1200 x 16mm	Class A	904 ME904	.60	35	.84	White	А	Low		45%
SLT	2 x 2 x 5/8" 600 x 600 x 16mm	Class A	905 ME905	.60	33	.84	White	D	Low		45%
	2 x 4 x 5/8" 600 x 1200 x 16mm	Class A	908 ME908	.60	35	.84	White	D	Low		45%
FLB	2 x 2 x 5/8" 600 x 600 x 16mm	Class A	916 ME916	.60	33	.84	White	E, F, G, H	Low		45%
	2 x 4 x 5/8" 600 x 1200 x 16mm	Class A	911 ME911	.60	35	.84	White	E, F, G, H	Low		45%

LEGEND

Low Emission (VOC Class)

ClimaPlus Superior Performance

Meets the emission test criteria as low-emitting prescribed by the Singapore Green Building Council (SGBC) following ASTM D5116-06 testing methods.

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew.

D DX° DXI A DX® C Omega Centricitee™ DXT™ Fineline® 1/8" Fineline® 1/8" Omega¹ DXM™ DXI DXM™ DXFF DXF™ DXII DXII DXIII DXIII

GRID PROFILE OPTIONS

PHYSICAL DATA/ **FOOTNOTES**

ASTM E1264 Classification Type III, Form 2, Pattern C, D, E

ASTM E84 surface burning

characteristics Class A Flame spread: 25 Smoke developed: 50

Imperial Weight 0.79-0.86 lb./ft.²

Thermal Resistance R-1.7

Backloading Refer to Installation and Maintenance

- Footnotes
 1. For details, see LEED report tool at usgdesignstudio.com
- 2. LR values are shown as averages.
- 3. Not all panels sizes available in all geographic areas, some metric sizes available to order.

Short Specification:

- Nominal size (600mm x 600mm / 600mm x 1200mm) x 16mm / (2' x 2' / 2' x 4') x 5/8". Edge detail shall be (Fineline Bevel [FLB] / Shadowline Tapered [SLT] / Square [SQ]). Limiting Conditions Maximum 49°C (120°F)/99% RH.

TRADEMARKS
The trademarks CENTRICITEE, CLIMAPLUS, DONN,
DX, DXF, DXFF, DXM, OMEGA, DXI, DXT, FINELINE,
IDENTITEE, IMPRESSIONS and INNOVATION INSPIREDBY YOU are trademarks of USG Boral BuildingProducts or one of more of its affiliates.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.



